

# PICKLEPAVE

“The Official Do-It-Yourself Court Surface of the **USAPA**”



**California Sports Surfaces**, the world leader in athletic surfacing is excited to introduce PicklePave, the first product intended primarily for use on Pickleball courts and fully endorsed by the USA Pickleball Association.

PicklePave is a durable, 100% acrylic textured surface, which will protect and spruce up your court, while providing superior, consistent footing for your game.

Available in ready-to-use five-gallon pails, PicklePave comes in four vibrant, long-lasting colors and can be installed by an experienced contractor at a multi-court facility or a weekend warrior, looking to improve a backyard court.

California Sports Surfaces has long been a pioneer in acrylic athletic surfacing, providing high-quality courts for many of the world’s top tennis tournaments for more than 50 years. California Sports Surfaces has also surfaced the courts at the USAPA Nationals and the US Open PickleBall Championships. Let PicklePave help transform your driveway, patio, or parking lot into a great Pickleball court.



For more information about availability and pricing, please visit [www.usapa.org](http://www.usapa.org)

Bring your game up,  
by putting some  
**PicklePave** down!




## Available Colors

EMERALD




CRIMSON

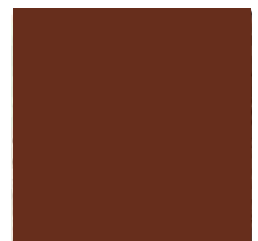


CAMEL



ROYAL BLUE



# Pickleball Court Dimensions

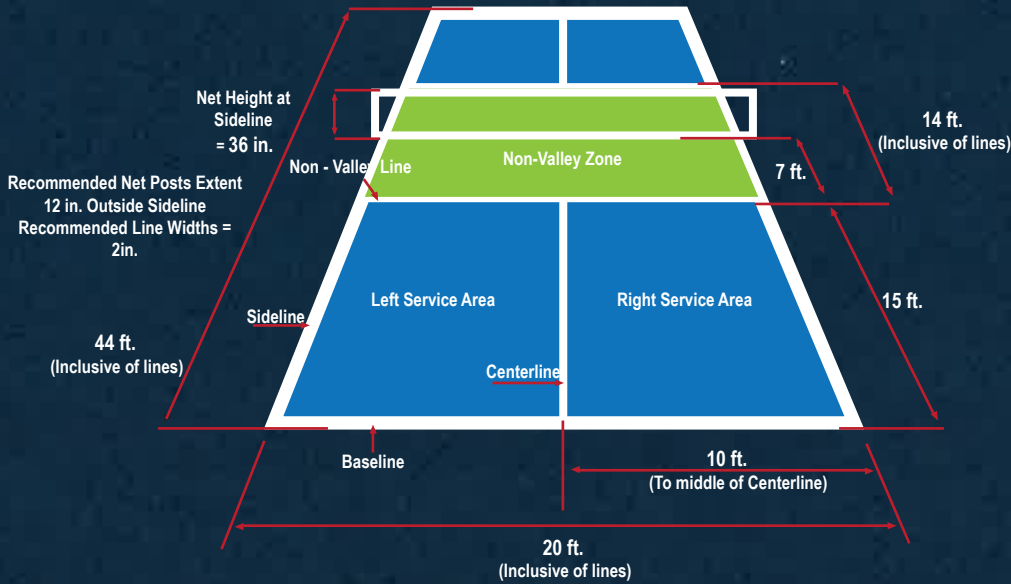

## DATA/SPECIFICATIONS

### PicklePave 100% Acrylic Anti-Slip Surface Coating

#### PRODUCT DESCRIPTION:

PICKLEPAVE is a 100% acrylic-textured pavement coating for use over asphalt or concrete surfaces, anywhere an extremely durable, skid resistant finish is desired.

#### SURFACE PREPERATION:

New asphalt must cure for 14 days and new concrete surfaces must cure for at least 28 days prior to applying PICKLEPAVE. The surface on which PICKLEPAVE is to be applied must be well drained, free of dirt, loose or flaking paint, oily materials or chemical residues, vegetation of any sort and any other debris or foreign matter that may prevent the proper product adhesion. In cold weather climates, de-icing chemicals may damage coatings. PICKLEPAVE will not prevent surface or structural cracks, and it should not be used as a filler material for divots, low areas, or rough pavement.

#### APPLICATION:

PICKLEPAVE may be applied by brush, ¾ inch roller or squeegee. Stir contents thoroughly to insure even dispersion. The most effective method is to pour a 3-5 inch ribbon of PICKLEPAVE, sufficient to cover the surface to be coated, then either brush, roll or squeegee over the entire surface.

#### PRECAUTIONS:

Do not apply when air and surface temperature are below 50°(10 °C). Do not apply when rain is imminent. Do not apply when surface is above 140°(60 °C). Do not apply over tar emulsions less than 4 years old. Do not exceed application rate. Only apply product to concrete areas with a medium or rougher broom finish. Acid wash concrete pads prior to application. Do not allow traffic over surface for at least 24 hours (or 48 hours in humid conditions).

#### SAFETY INFORMATION:

Keep out of reach of children. Do not take internally. Close container after each use.

#### Application Rate:

Concrete: 120 SQ. FT. PER GAL.  
 Asphalt: 90 SQ. FT. PER GAL.  
 (Depends on porosity of substrate per coat)

#### SPECIFICATIONS

Type:	Acrylic Latex
Exposure:	Interior or Exterior
Specular Gloss:	<5 @ 60° ±5
Volume Solids:	67.2 % ±2
Solids by Weight:	80.0 % ±2
Vehicle:	35.5 % ±2
Pigment:	64.5 % ±2
Dry Film Thickness:	9 mils
Viscosity @ 77 °F:	85 KU ± 5
Maximum VOC:	100 g/liter
Flash Pt °F:	Non-combustible
Thinner:	Water
Clean Up:	Soap & Water

#### Available Color and Bases:

4 Stock

#### Available Package Sizes:

5 Gallon Buckets  
 (Weight Per Gallon: 13.8 lbs. ± .5 lb)

#### Drying Times:

To Touch: N/A hrs.  
 To Handle: 48\* hrs.  
 To Re-coat: N/A hrs.  
 (@ 70-77 °F, 50% R.H.)

#### Tools and Equipment:

Roller-  
 3/4" Nap Synthetic Fiber  
 Squeegee-  
 70 Durometer Recommended

# California

**SPORTS SURFACES**

150 Dascomb Road, Andover, MA 01810, USA  
 Toll Free: 800.225.1141 | Phone: 978.623.9980 | Fax: 978.623.9960  
[www.californiasportssurfaces.com](http://www.californiasportssurfaces.com) | [info@www.californiasportssurfaces.com](mailto:info@www.californiasportssurfaces.com)



